

PHYSICS**0625/43**

Paper 4 Extended Theory

May/June 2019

MARK SCHEME

Maximum Mark: 80

Published

This mark scheme is published as an aid to teachers and candidates, to indicate the requirements of the examination. It shows the basis on which Examiners were instructed to award marks. It does not indicate the details of the discussions that took place at an Examiners' meeting before marking began, which would have considered the acceptability of alternative answers.

Mark schemes should be read in conjunction with the question paper and the Principal Examiner Report for Teachers.

Cambridge International will not enter into discussions about these mark schemes.

Cambridge International is publishing the mark schemes for the May/June 2019 series for most Cambridge IGCSE™, Cambridge International A and AS Level and Cambridge Pre-U components, and some Cambridge O Level components.

This syllabus is regulated for use in England, Wales and Northern Ireland as a Cambridge International Level 1/Level 2 Certificate.

This document consists of **10** printed pages.

Generic Marking Principles

These general marking principles must be applied by all examiners when marking candidate answers. They should be applied alongside the specific content of the mark scheme or generic level descriptors for a question. Each question paper and mark scheme will also comply with these marking principles.

GENERIC MARKING PRINCIPLE 1:

Marks must be awarded in line with:

- the specific content of the mark scheme or the generic level descriptors for the question
- the specific skills defined in the mark scheme or in the generic level descriptors for the question
- the standard of response required by a candidate as exemplified by the standardisation scripts.

GENERIC MARKING PRINCIPLE 2:

Marks awarded are always **whole marks** (not half marks, or other fractions).

GENERIC MARKING PRINCIPLE 3:

Marks must be awarded **positively**:

- marks are awarded for correct/valid answers, as defined in the mark scheme. However, credit is given for valid answers which go beyond the scope of the syllabus and mark scheme, referring to your Team Leader as appropriate
- marks are awarded when candidates clearly demonstrate what they know and can do
- marks are not deducted for errors
- marks are not deducted for omissions
- answers should only be judged on the quality of spelling, punctuation and grammar when these features are specifically assessed by the question as indicated by the mark scheme. The meaning, however, should be unambiguous.

GENERIC MARKING PRINCIPLE 4:


Rules must be applied consistently e.g. in situations where candidates have not followed instructions or in the application of generic level descriptors.

GENERIC MARKING PRINCIPLE 5:

Marks should be awarded using the full range of marks defined in the mark scheme for the question (however; the use of the full mark range may be limited according to the quality of the candidate responses seen).

GENERIC MARKING PRINCIPLE 6:

Marks awarded are based solely on the requirements as defined in the mark scheme. Marks should not be awarded with grade thresholds or grade descriptors in mind.

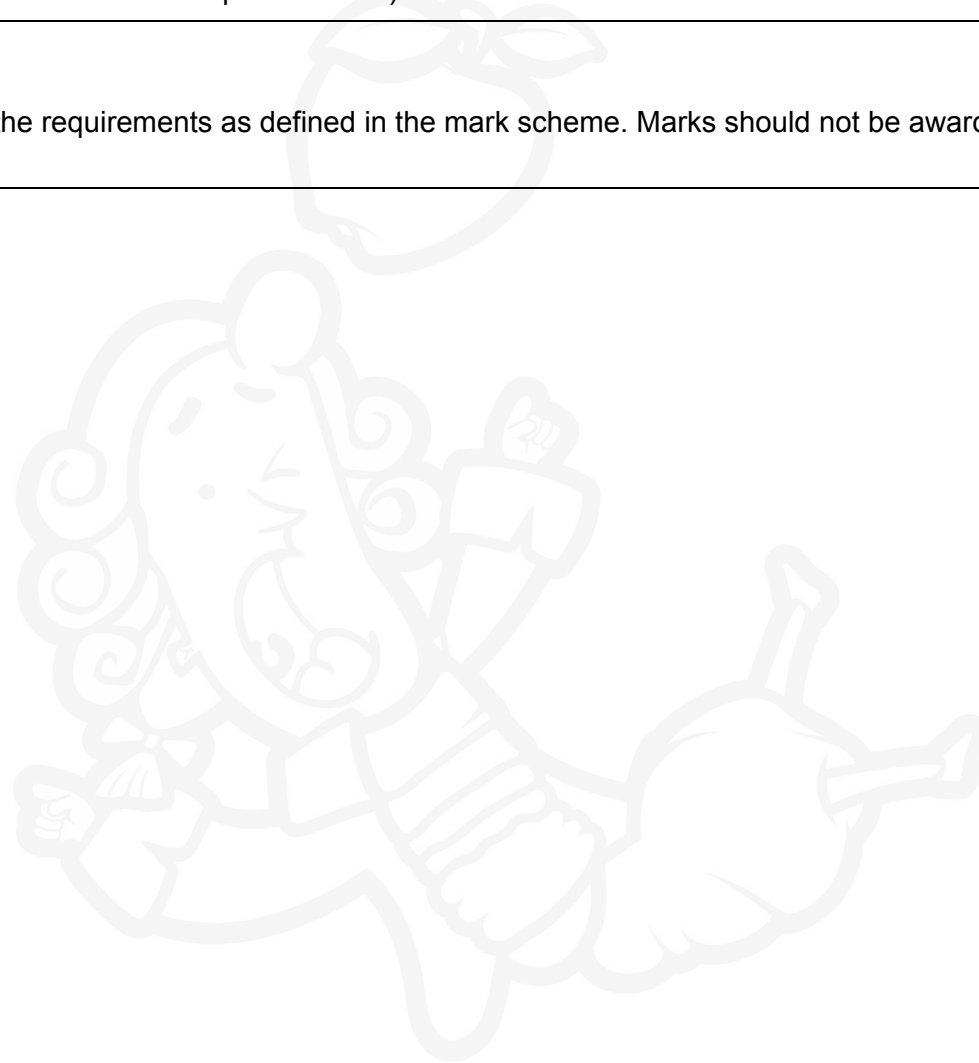

Question	Answer	Marks
1(a)(i)	constant velocity / speed	B1
1(a)(ii)	deceleration / negative acceleration	B1
1(a)(iii)	Stationary	B1
1(b)	$v = \text{gradient OR } \frac{\text{distance}}{\text{time}} \text{ OR } \underline{160} \frac{160}{100} \text{ OR evidence of use of gradient}$	C1
	$(v =) 1.6 \text{ m/s}$	A1
1(c)	line curves upwards with increasing gradient NOT vertical	B1

Question	Answer	Marks
2(a)	$\text{KE} = \frac{1}{2} mv^2 \text{ in any form OR } (\text{KE}) = \frac{1}{2} \times 1.2 \times 10^6 \times 0.04^2$	C1
	$(\text{KE} =) 960 \text{ J}$	A1

Question	Answer	Marks
2(b)	EITHER	
	(change in momentum) = mv OR (change in momentum) = $1.2 \times 10^6 \times 0.04$	C1
	(=) 4.8×10^4 (kg m/s)	C1
	change in momentum = Ft in any form	C1
	(Force = $4.8 \times 10^4 / 0.3$ =) 1.6×10^5 N	A1
	OR	
	$a = (v-u)/t = 0.04/0.3$	(C1)
	= 0.13 (m/s ²)	(C1)
	$F = ma$	(C1)
	(Force = $1.2 \times 10^6 \times 0.13$ =) 1.6×10^5 N	(A1)
2(c)	Work done or KE transferred = Fd in any form	C1
	(distance = $960 / 1.6 \times 10^5$ =) 6.0×10^{-3} m OR 0.006 m OR 0.60 cm	A1
2(d)	smaller force (on dock/ship) because increases time of collision OR increased distance of collision (on the dock/ship)	B1

Question	Answer	Marks
3(a)	$(p) = \rho gh$ in any form OR $(p =) 1030 \times 10 \times 3.0 \times 10^3$	C1
	3.1×10^7 Pa	A1
3(b)(i)	$v = d/t$ OR $v = 2d/t$ in any form	C1
	$1500 = \frac{2d}{0.50}$ OR $2d = 1500 \times 0.50$	C1
	380 m	A1
3(b)(ii)	distance smaller (first box ticked) AND speed of sound lower (in air than liquid)	B1

Question	Answer	Marks
4(a)	Any two from: bubbles form OR occurs throughout liquid only occurs at one temperature/boiling point does not produce cooling OR not affected by surface area / humidity / draught OR does not lower KE of molecules left in the liquid.	B2
4(b)	$E = Pt$ in any form OR $(E) = 370 \times 240$	C1
	= 89 000 (J)	A1
	$E = mc\Delta T$ in any form	C1
	(temperature increase =) $89\,000 / \{5.0 \times 420\} =) 42\text{ }^\circ\text{C}$	A1

Question	Answer	Marks
5(a)	any mention of <u>radiation/infra-red radiation</u> wrt silvered surfaces	B1
	silvered surfaces are poor emitters / poor absorbers / (good) reflectors	B1
	glass is a poor conductor OR glass reduces thermal energy / heat gain by conduction	B1
	vacuum prevents thermal energy / heat gain by conduction OR convection	B1
	stopper reduces thermal energy / heat gain by convection	B1
5(b)	any suitable insulator e.g. cork, plastic, rubber	B1

Question	Answer	Marks
6(a)(i)	diffraction	B1
6(a)(ii)	wave on left half the wavelength of waves in Fig 6.1	B1
	both wavelengths on right same wavelength as on left	B1
	much less spreading than in Fig 6.1	B1
6(b)	3 numbers correct	B1
	all 5 numbers correct (Correct answer: 1, 4, 5, 3, 2)	B1
6(c)(i)	3.0×10^8 m/s	B1
6(c)(ii)	$v = f\lambda$ in any form OR ($\lambda = v/f$)	C1
	96×10^6 seen	C1
	$(\lambda = \frac{3.0 \times 10^8}{96 \times 10^6} =) 3.1$ m	A1

Question	Answer	Marks
7(a)	40°	B1
7(b)	n = 1.3 OR seen in calculation	C1
	sin i / sin r = n in any form OR sin 40 / sin r = n sin i / sin r = 1 / n	C1
	(sin r = 1.3 × sin 40°) (r =) 57°	A1

Question	Answer	Marks
8(a)	P = VI in any form	C1
	$I (= \frac{700}{240}) = 2.9 \text{ A}$	A1
8(b)	13 A fuse	B1
	any two out of: 2.9 + 7.5 SEEN if too low it would break / blow / melt when the appliances are operating normally if fuse too high wouldn't break / blow until current was too high which would be dangerous (to people /wires /appliance)	B2
8(c)	(Resistance inversely proportional to area so) resistance of thicker wire is lower	B1
	Fuse will melt at higher current	B1
	because heating effect = $I^2 R$ OR less heating effect (for same current) owtte	B1
8(d)(i)	Any two renewable sources of energy from: solar, wind, water, hydroelectric, waves, tidal, geothermal	B2
8(d)(ii)	Any relevant disadvantage for one of their <u>correct</u> answers to (d)(i) e.g.: Energy for wind / waves / Sun not always available Cost of building wind turbines or tidal barrages or hydroelectric dams Wind turbines affect the scenery of some areas Solar (farms) use (agricultural) land / takes up a lot of space	B1

Question	Answer	Marks															
9(a)	light dependent resistor OR LDR	B1															
9(b)	<table border="1"> <thead> <tr> <th data-bbox="329 277 754 341">Input 1</th> <th data-bbox="754 277 1180 341">Input 2</th> <th data-bbox="1180 277 1599 341">Output</th> </tr> </thead> <tbody> <tr> <td data-bbox="329 341 754 405">0</td> <td data-bbox="754 341 1180 405">0</td> <td data-bbox="1180 341 1599 405">1</td> </tr> <tr> <td data-bbox="329 405 754 469">0</td> <td data-bbox="754 405 1180 469">1</td> <td data-bbox="1180 405 1599 469">0</td> </tr> <tr> <td data-bbox="329 469 754 533">1</td> <td data-bbox="754 469 1180 533">0</td> <td data-bbox="1180 469 1599 533">0</td> </tr> <tr> <td data-bbox="329 533 754 596">1</td> <td data-bbox="754 533 1180 596">1</td> <td data-bbox="1180 533 1599 596">0</td> </tr> </tbody> </table>	Input 1	Input 2	Output	0	0	1	0	1	0	1	0	0	1	1	0	
	Input 1	Input 2	Output														
	0	0	1														
	0	1	0														
1	0	0															
1	1	0															
2 input columns and one output column AND 4 correct rows of input	B1																
All 4 rows with correct, in any order	B1																
9(c)	<table> <tr> <td data-bbox="329 772 367 804">D</td> <td data-bbox="367 772 405 804">E</td> </tr> <tr> <td data-bbox="329 804 367 836">1</td> <td data-bbox="367 804 405 836">1</td> </tr> <tr> <td data-bbox="329 836 367 868">1</td> <td data-bbox="367 836 405 868">1</td> </tr> <tr> <td data-bbox="329 868 367 900">0</td> <td data-bbox="367 868 405 900">0</td> </tr> <tr> <td data-bbox="329 900 367 932">0</td> <td data-bbox="367 900 405 932">1</td> </tr> </table>	D	E	1	1	1	1	0	0	0	1						
	D	E															
	1	1															
	1	1															
0	0																
0	1																
all D correct	B1																
first 2 rows of E correct	B1																
last 2 rows of E correct	B1																
9(d)	conductors have free / delocalised electrons / electrons which move (freely) (electrons in insulators don't move or are fixed)	B1															

Question	Answer	Marks
10(a)	Correct shape of graph showing one rotation	B1
	Graph starts from maximum voltage (positive or negative) (labelled horizontal)	B1
	Graph passes through zero twice, labelled 1 / 4 and 3 / 4 revolution	B1
10(b)	induced e.m.f. caused by coil cutting magnetic field OR coil moving in magnetic field	B1
10(c)	slip rings	B1
	(provide) continuous connection while coil rotating	B1
10(d)	Any two of: increase strength of magnetic field increase speed of rotation of the coil increase numbers of turns of coil	B2

Question	Answer	Marks
11(a)	${}_{95}^{241}\text{Am} \rightarrow {}_2^4\alpha + {}_{93}^{237}\text{Np}$	
	Am on L with correct proton no	B1
	Am on L with correct nucleon no	B1
	alpha symbol on R with correct proton and nucleon no	B1
	Np on R with correct proton and nucleon no.	B1
11(b)(i)	current decreases / is stopped AND alpha particles absorbed (by smoke) owtte	B1
11(b)(ii)	Any two from: alpha particles highly ionizing / more ionising than beta particles or gamma rays alpha particles short range (in air) safer to use alpha because they do not travel out of smoke detector	B2